



OPERATORS

for potentially explosive atmospheres
flameproof enclosure
II2G Ex d IIB+H2 Gb T6...T4, II2D Ex tb IIIC Db IP66/IP67
aluminium or stainless steel enclosure

Series
LPKF
WSLPKF

FEATURES

- Explosionproof operator for use in potentially explosive atmospheres according to Directive ATEX 2014/34/EU
- EC type examination certificate (LCIE 10 ATEX 3043X) and IECEx certificate (IECEx LCI 10.0010X) are in compliance with the International and European Standards IEC and EN: 60079-0, 60079-1 and 60079-31
- Easy electrical installation by means of a screw terminal coil
- Enclosure provided with a 1/2 NPT threaded entry hole for a broad range of cable entries
- Ingress protection degree IP67 - NEMA 4/4X
- A wide range of valves can be supplied with the operator

CONSTRUCTION

Solenoid enclosure

LPKF
WSLPKF
LPKF
WSLPKF

Aluminium, cataphoresis black painting
Stainless steel (AISI 316L)
Stainless steel
Stainless steel (AISI 316L)
Stainless steel
Stainless steel
VMQ
FPM
NBR
Stainless steel
Embedded screw terminals

Bonnet

Cover screws

Core, core tube and plugnut

Seals

Upper disc

Lower- disc

Nameplate

Coil connection

ELECTRICAL CHARACTERISTICS

Standard voltages

DC (=): 24V - 48V

AC (~): 24V - 48V - 115V - 230V / 50 Hz

SAFETY CODE

II2G Ex d IIB+H2 Gb T6...T4

II2D Ex tb IIIC Db T85°C...T135°C IP66/IP67

TEMPERATURE CLASSIFICATION TABLES

The minimum allowable ambient temperature is -40°C for the operator.

Select the requested "T" classification from the temperature classification table (AC or DC), respecting the maximum ambient temperature and cold (20°C) electrical holding power value.

AC (~) Solenoids

DC (=) Solenoids

power level (watt)	insulation class	maximum ambient temp. °C ⁽⁵⁾		
		"T" classification		
		T6	T5	T4
Low power (LP)				
-	-	-	-	-
2,4 ⁽²⁾⁽⁴⁾	F	40	65	80



power level (watt)	insulation class	maximum ambient temp. °C ⁽⁵⁾		
		"T" classification		
		T6	T5	T4
Low power (LP)				
0,5 ⁽³⁾	F	60	-	-
2,1 ⁽⁴⁾	F	40	-	80

⁽²⁾ AC (~): rectified coil construction.

⁽³⁾ 24 V DC value.

⁽⁴⁾ Maximum cold wattage.

⁽⁵⁾ For the layout of the control circuit, see the installation and maintenance instructions at: www.asconumatics.eu

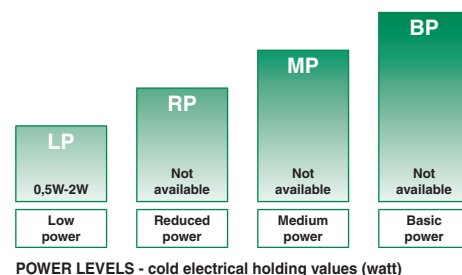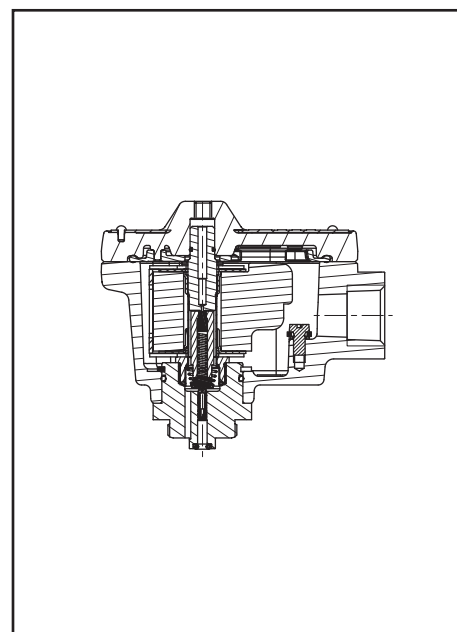

POWER LEVELS - cold electrical holding values (watt)

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

сайт: <http://asco.nt-rt.ru> || эл. почта: ach@nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93



сайт: <http://asco.nt-rt.ru> || эл. почта: ach@nt-rt.ru


SERIES LPKF/WSLPKF

PREFIX TABLE

prefix							description	power level			
1	2	3	4	5	6	7		LP	RP	MP	BP
L	P	K	F				Flameproof- Aluminium (IEC/EN: 60079)	●	-	-	-
W	S	L	P	K	F		Flameproof- St. steel (IEC/EN: 60079)	●	-	-	-
						X	Other special constructions	-	-	-	-

- Available feature
- Not available

ORDERING EXAMPLES:

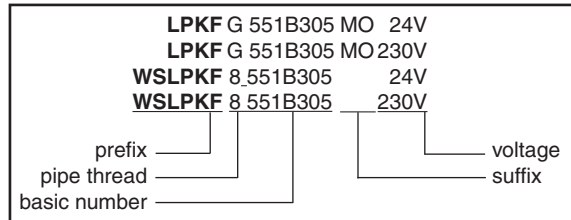

60°C ambient
Low Power (LP) 0,5 W
II2G Ex d IIB+H2 Gb T6
II2D Ex tb IIIC Db IP67

T85°C
STEP 4
Final catalogue / ordering number.
Example:
LPKF 8551B305 24V / DC

PRODUCT SELECTION GUIDE

(The selection can only be made in conjunction with the appropriate valve catalogue sheet)

STEP 1

Select basic valve catalogue number, including pipe thread identification letter from one of the specification tables on the separate catalogue pages.

Example: G551B305

STEP 2

Select voltage. Refer to standard voltages on page 1.

Example: 24V / DC

STEP 3

Select solenoid prefix (combination). Refer to the prefix table on this page and respect the indicated power level, cold electrical holding values and "T" classification mentioned on page 1.

NOTE: Make sure that the ambient temperature does not exceed the allowable valve temperature characteristics.

Example: LPKF

INSTALLATION

- Multi language installation/maintenance instructions are included with each valve
- The solenoid valves can be mounted in any position without affecting operation
- Internal and external earthing connection
- The solenoid can be rotated 360° to select the most favourable position for cable entry

DIMENSIONS (mm), WEIGHT (kg)



TYPE 01:
Prefix "LPKF" Solenoid
Aluminium, revêtement époxy
IEC and EN: 60079-1, 60079-31
II2G Ex d IIB+H2 Gb T6...T4 - II2D Ex tb IIIC Db IP66/IP67



TYPE 02:
Prefix "WSLPKF" Solenoid
Stainless steel, epoxy coated
IEC and EN: 60079-1, 60079-31
II2G Ex d IIB+H2 Gb T6...T4 - II2D Ex tb IIIC Db IP66/IP67

