

FEATURES

- The Booster valves have a balanced piston construction providing very high flow
- IEC 61508 Functional Safety figures are available; SIL 3 capable
- Suitable for on-off and control e.g. for Partial Stroke Testing (PST)
- Very large ambient temperature range capability
- Low friction construction providing lowest sticking risk and highest life time
- Controllable by-pass for optimum controllability; control ratio 1:1
- Optional modular inlet and/or exhaust filters available
- Direct NAMUR mount of solenoid pilot valve
- Available in both anodised aluminium and 316L stainless steel
- ATEX and CUTR certified; IP66/67
- Integrated mounting holes
- Can be integrated in modular ASCO Actuator Control System (ACS)
- NACE compliant for the environment (stainless steel execution)

GENERAL

Differential pressure 0 - 10 bar [1 bar = 100kPa]

Maximum viscosity 65cST (mm²/s)

Response times 75 - 100 ms

fluids (*)	temperature range (TS)	seal material (*)
air, inert gas	-20 to +90°C	FPM (fluorelastomer)
	-60 to +60°C	PUR (polyurethane), FEP (fluorinated ethylene propylene), (F)VMQ (fluorosilicone) ⁽¹⁾

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

	Stainless steel body	Aluminium body
Body	AISI 316L SS	Aluminium, hard anodised
Stem	Stainless steel	Stainless steel
Springs	Stainless steel	Stainless steel
Sealings & poppets	FPM / PUR, FEP, (F)VMQ ⁽¹⁾	FPM / PUR, FEP, (F)VMQ ⁽¹⁾

⁽¹⁾ PUR for static seals; FEP and (F)VMQ for dynamic seals

SPECIFICATIONS



pipe size	orifice size	flow coefficient Kv / Cv			operating pressure differential (bar)		basic catalogue number ⁽²⁾	
					min. ⁽³⁾	max. (PS) air/gas (*)		
❖	(mm)	(m ³ /h)	(l/m)	(gpm)		~/=	aluminium	stainless steel
3/3 volume booster								
1/2	16	4,0	63	4,6	0,3	10	❖ 330A4A000	❖ 330A4S000
1	28	11	183	12,7	0,3	10	❖ 330A6A000	❖ 330A6S000

❖ Select 8 for NPT ANSI 1.20.3 or Select G for ISO G(228/1)

⁽²⁾ See page 2 for complete catalogue numbers build up

⁽³⁾ On-off : Minimum pilot pressure: 2 bar

Control : Outlet pressure = Pilot pressure (2-10 bar)

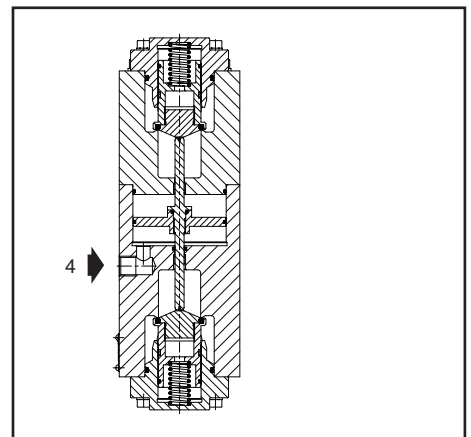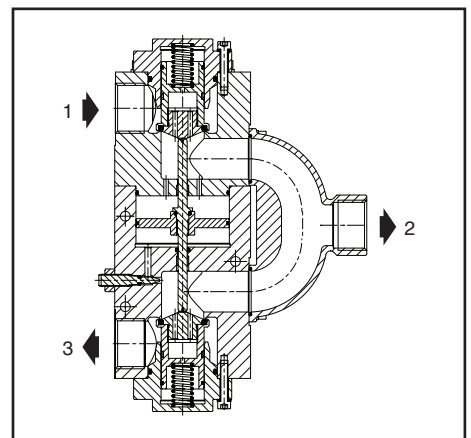

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16


Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

PRODUCT SELECTION GUIDE


PRODUCT CODE										
	8	330	A	6	S	0	0	0	A00	00
Connection type										
8 = NPT body connections										
G = BSP body connections (ISO 228 standard)										
Product series										
330										
Revision										
A										
Port size										
4 = 1/2" thread										
6 = 1" thread										
Body material										
A = Aluminium, hard anodised										
S = AISI 316L stainless steel										
Voltage										
00 = No voltage										
Options										
A00 = No option (FPM seals -20°C to +90°C)										
LTH = Low temperature (PUR, FEP, (F)VMQ seals -60°C to +60°C)										
1NF = Inlet filter										
EXF = Exhaust filter										
ALF = 1NF + EXF										
LT1 = LTH + 1NF										
LT2 = LTH + EXF										
LTA = LTH + 1NF + EXF										
Not used										
0 = Default										
Not used										
0 = Default										
Default characteristics										
0 = NAMUR interface - IP66/67 - SIL3 - ATEX non electrical- CTR certified										

DIMENSIONS (mm), WEIGHT (kg)

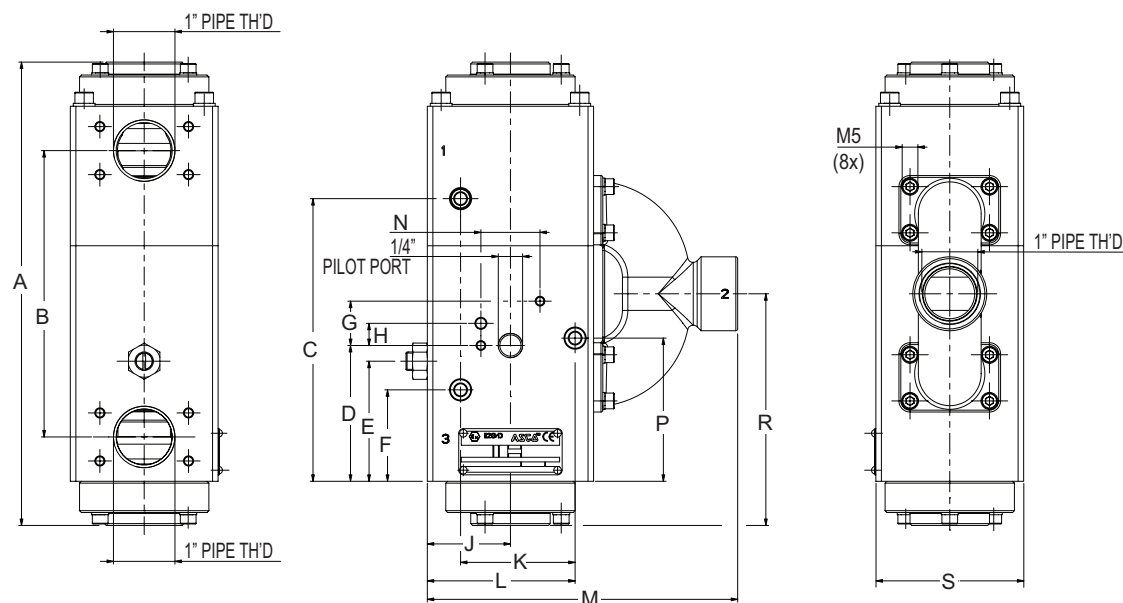


pipe size	body	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	weight
1/2	Aluminium	185,8	118	118	57	46,5	38	24	12	30	36	52	120,5	32	60,5	92,7	66	2,2 kg
	AISI 316L SS																	5,0 kg
1	Aluminium	250,8	155	153	73,5	65	49,5	24	12	45	62	80	168	32	77,5	125,4	80	4,2 kg
	AISI 316L SS																	10,6 kg

316L SS EXHAUST PROTECTOR - C (EXF) ⁽¹⁾

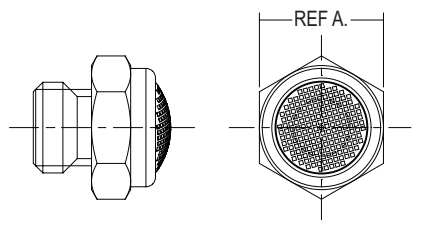
pipe size	thread	part number	mesh/filtering	wrench size (REF A.)	
1/2	ISO 228/1	131875-012	100 - 200 µm	24	
	NPT	131875-013			
1	ISO 228/1	131875-010	60 - 80 µm	36	
	NPT	131875-011			

INLET / OUTLET SPARE PARTS KITS

ASSEMBLY DRAWING 1/2 & 1"

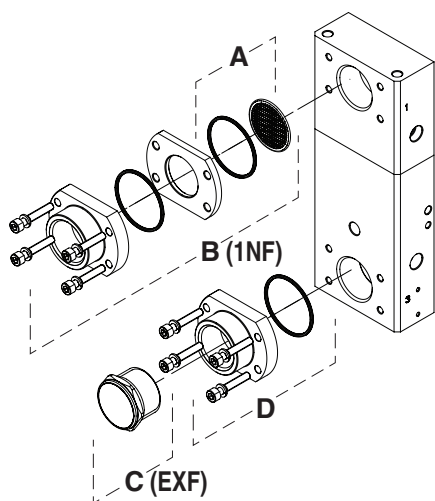

316 SS INLET/EXHAUST FILTER - A ⁽¹⁾

pipe size	filter type	mesh\filtering	
1/2	inlet	26 µm	
1			

SPARE PARTS KITS NO.

pipe size	catalogue number	booster valve maintenance kit number	replacement inlet filter - A ⁽¹⁾ kit number
FPM			
1/2	*330A4*000 - A00 / 1NF / EXF / ALF - 00	C326081	C326083
1	*330A6*000 - A00 / 1NF / EXF / ALF - 00	C325841	C325842
PUR, FEP and (F)VMQ			
1/2	*330A4*000 - LTH / LT1 / LT2 / LTA - 00	C326080	C326082
1	*330A6*000 - LTH / LT1 / LT2 / LTA - 00	C325837	C325838

⁽¹⁾ Refer to inlet/outlet spare parts kits assembly drawing as shown above

FILTER/NOZZLE KITS NO.

pipe size	catalogue number	thread	inlet filter module ⁽²⁾ B (1NF) ⁽¹⁾		nozzle module D ⁽¹⁾	
			Stainless steel	Aluminium	Stainless steel	Aluminium
FPM						
1/2	*330A4*000 - A00 / 1NF / EXF / ALF - 00	ISO 228/1	C326085 + C326089	C326085 + C326144	C326089	C326144
		NPT	C326085 + C326087	C326085 + C326143	C326087	C326143
1	*330A6*000 - A00 / 1NF / EXF / ALF - 00	ISO 228/1	C326042 + C326035	C326042 + C326140	C326035	C326140
		NPT	C326042 + C3265843	C326042 + C326139	C325843	C326139
PUR, FEP and (F)VMQ						
1/2	*330A4*000 - LTH / LT1 / LT2 / LTA - 00	ISO 228/1	C326084 + C326088	C326084 + C326142	C326088	C326142
		NPT	C326084 + C326086	C326084 + C326141	C326086	C326141
1	*330A6*000 - LTH / LT1 / LT2 / LTA - 00	ISO 228/1	C326041 + C325034	C326041 + C326138	C325034	C326138
		NPT	C326041 + C325839	C326041 + C326137	C325839	C326137

⁽¹⁾ Refer to inlet/outlet spare parts kits assembly drawings as shown on page 3

⁽²⁾ Can also be used for exhaust filter

HOW TO ORDER BOOSTER VALVE WITH SOLENOID PILOT VALVE



STEP 1

Configure product selection code following selection guide on page 2

Ordering example:
8330A6S0001NF00

STEP 2

Select ASCO NAMUR solenoid valve from the [327 series NAMUR catalogue page \(80107GB\)](#) and add TPL 27121

Ordering example:
NFX 8327B103 24V/DC TPL 27121

STEP 3

Order above mentioned codes to secure optimised special packaging.

NOTE: Mounting will be very easy using the supplied NAMUR mounting bolts and seals

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93